

FIG. 1 is a perspective view of a first embodiment of a device. The device consists of a long, thin, rectangular body (2) with a rounded end (10). A curved, hook-like structure (12) is attached to the rounded end. A small, rectangular component (4) is mounted on the side of the body near the rounded end. A dashed line (6) indicates a cross-section of the body. The body has a top surface (8) and a bottom surface (4). A curved arrow (2) indicates the direction of movement or rotation of the hook-like structure.

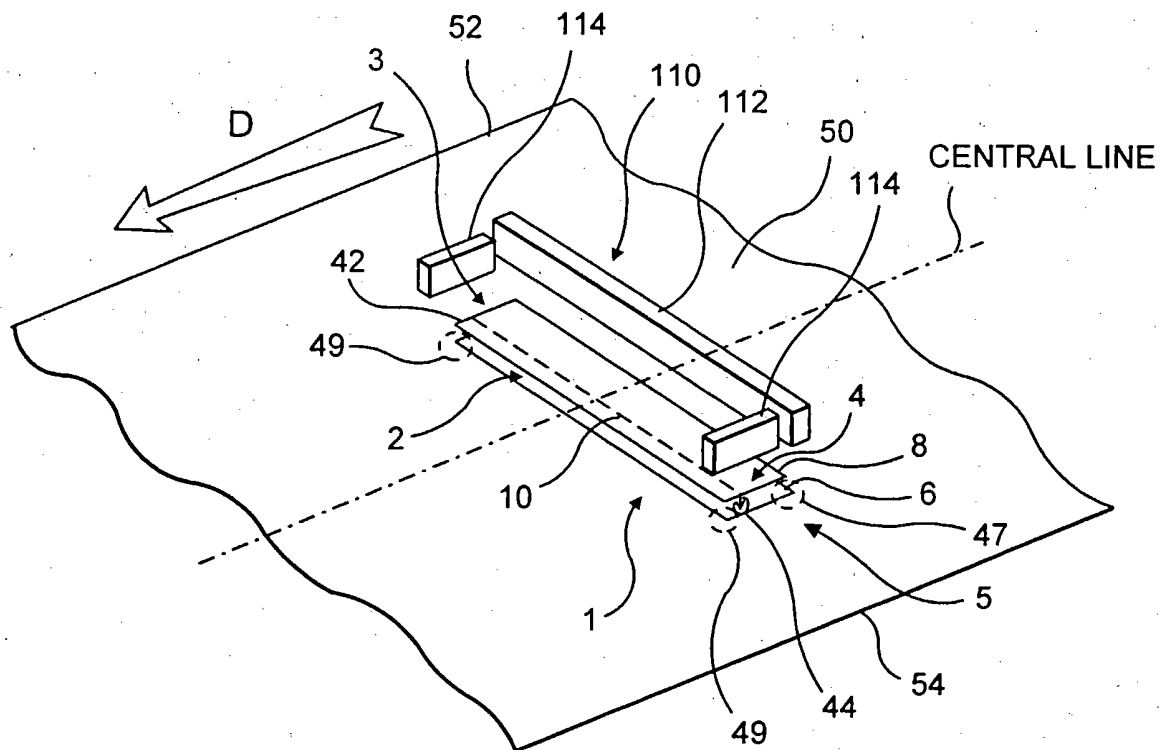


FIG. 2



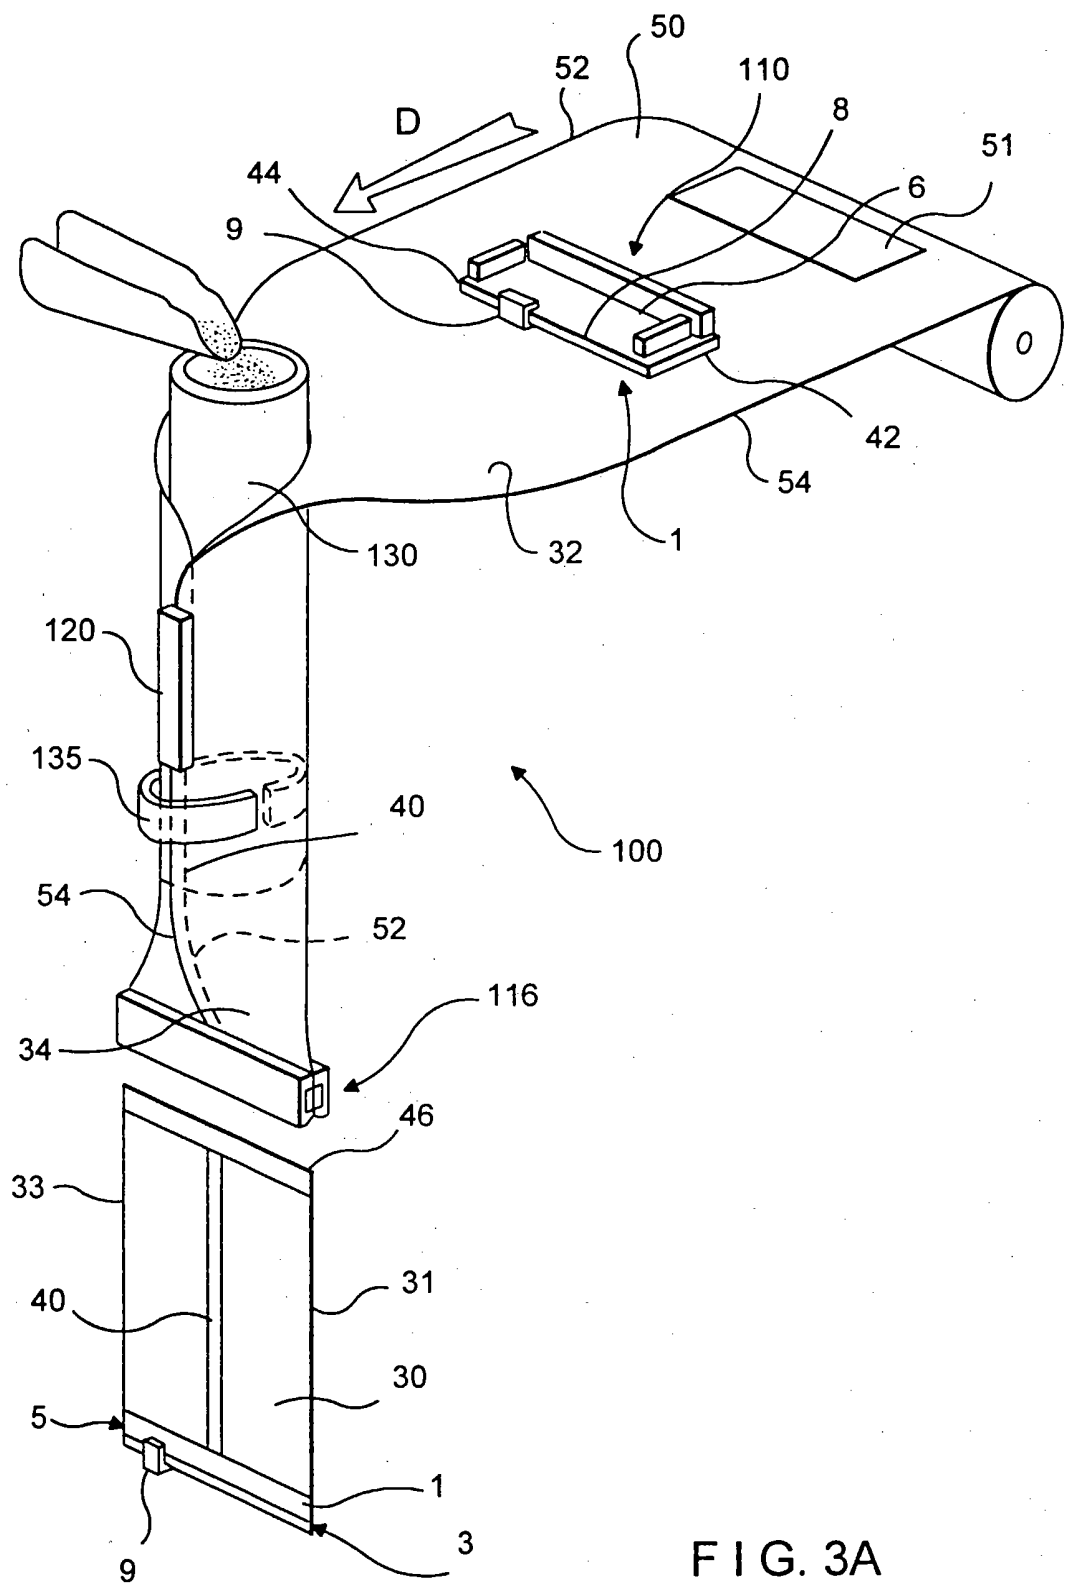


FIG. 3A

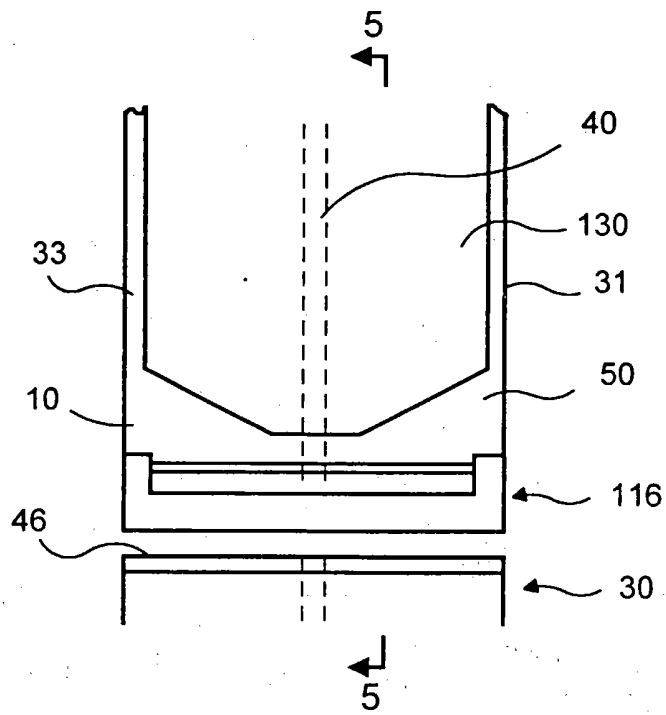


FIG. 4

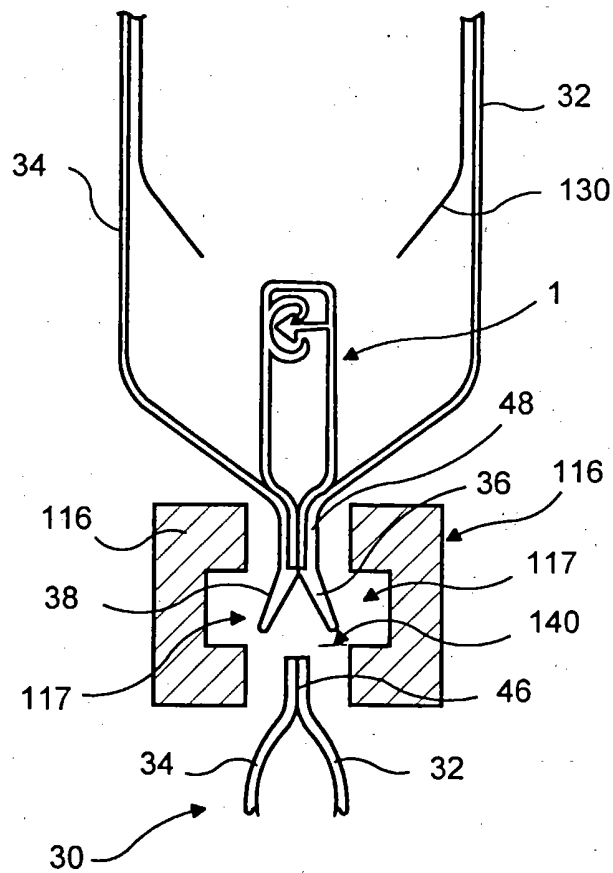


FIG. 5

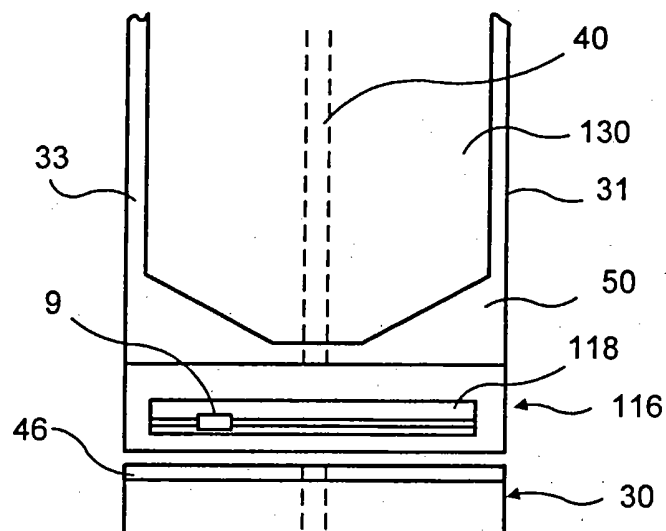


FIG. 4A

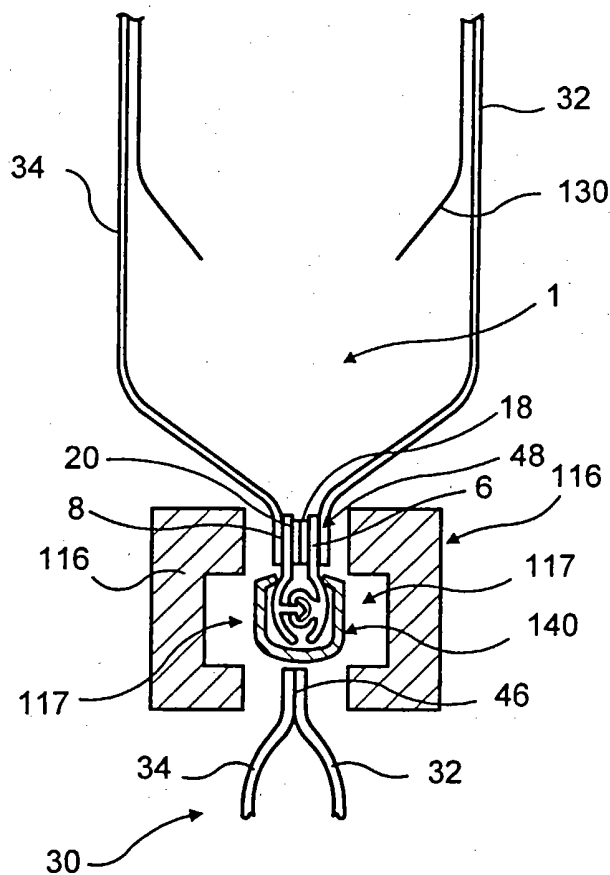


FIG. 5A

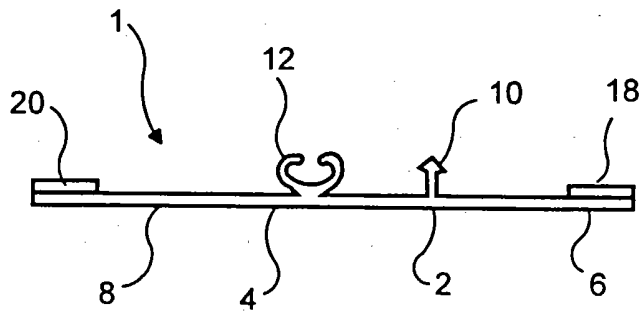


FIG. 6

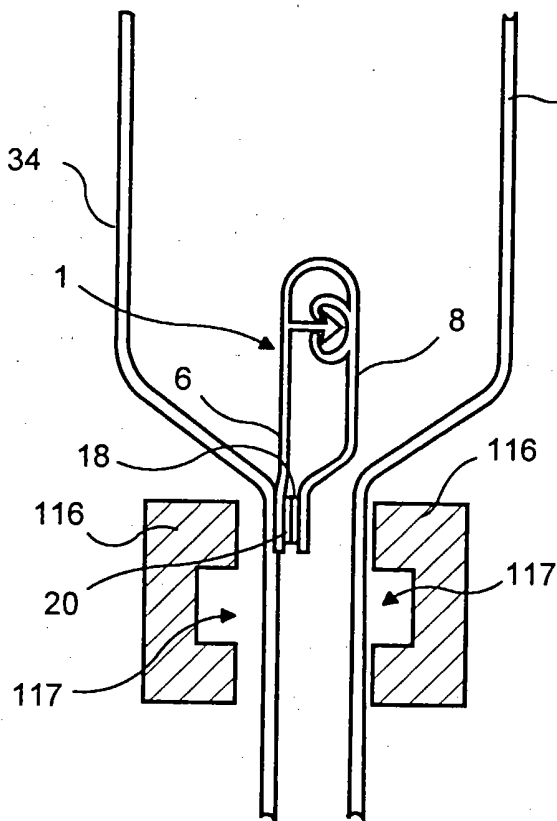


FIG. 7A

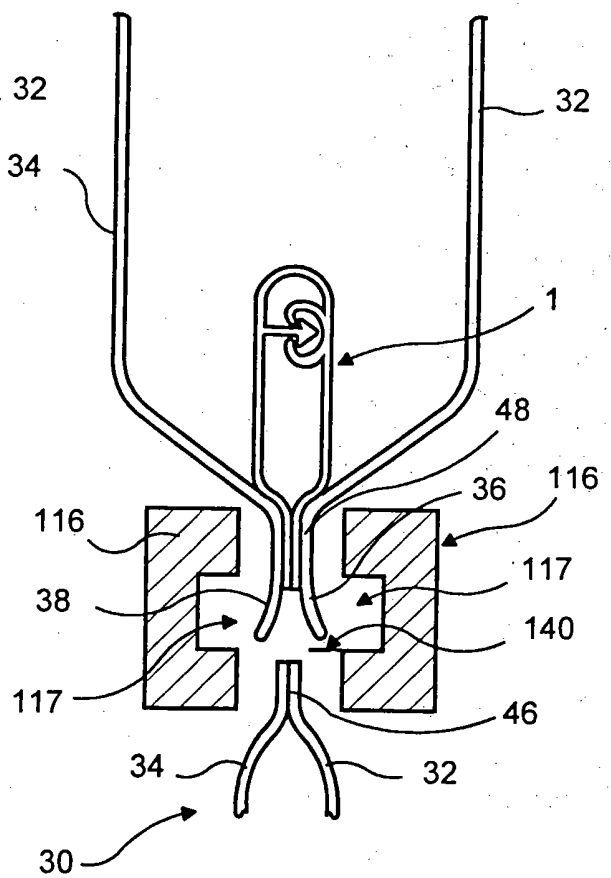


FIG. 7B

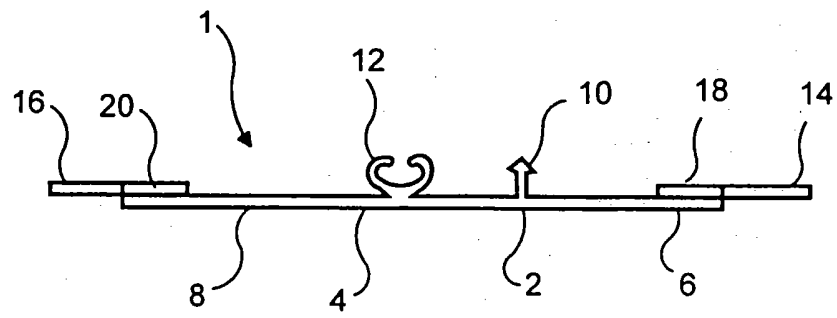


FIG. 8

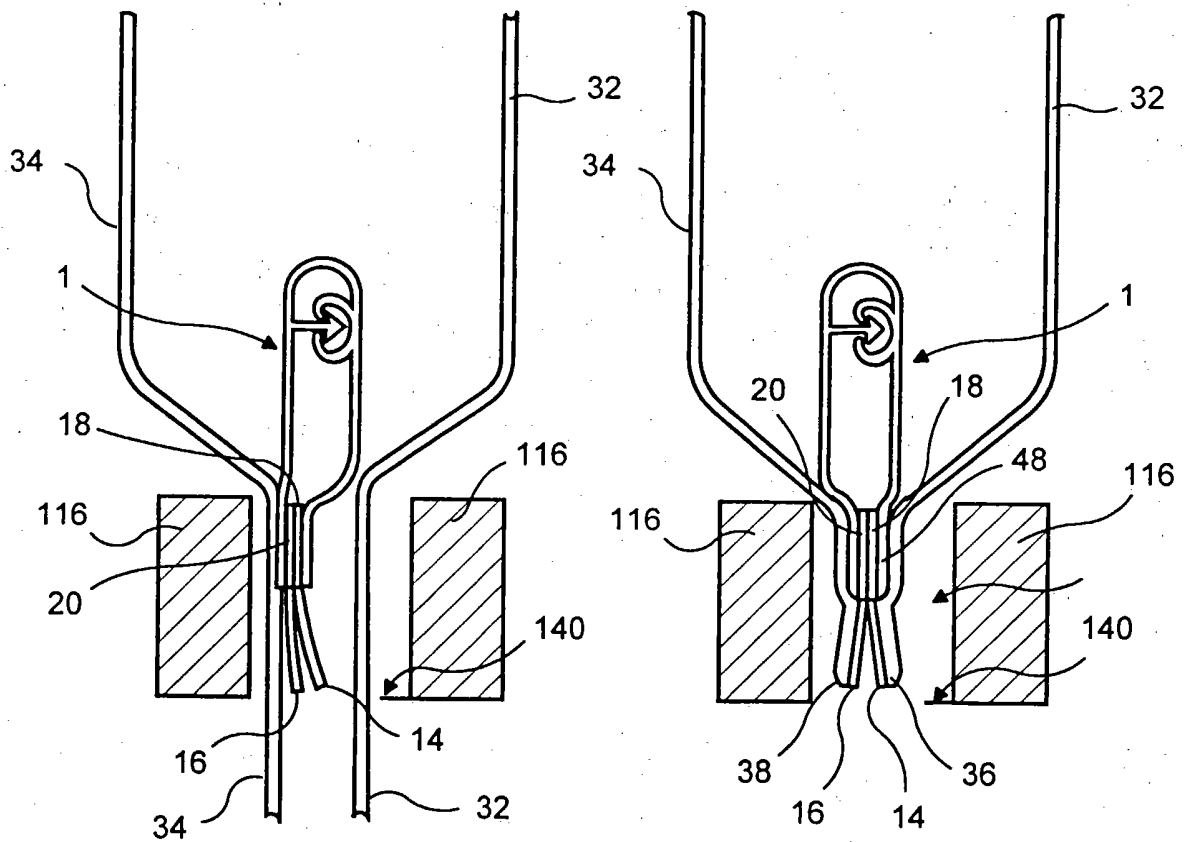


FIG. 9A

FIG. 9B

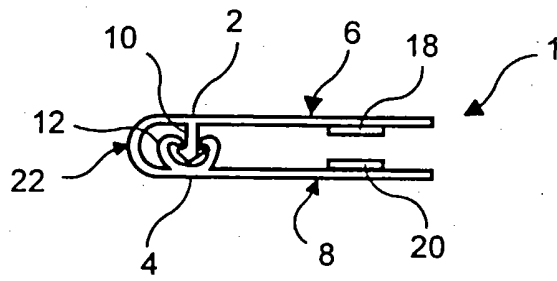


FIG. 10

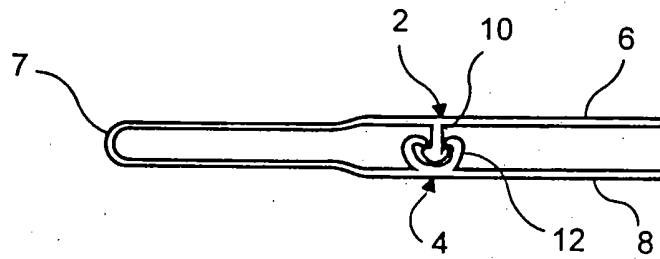


FIG. 11

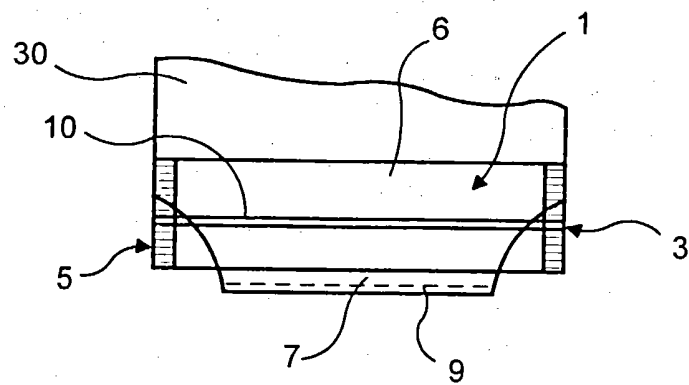


FIG. 12



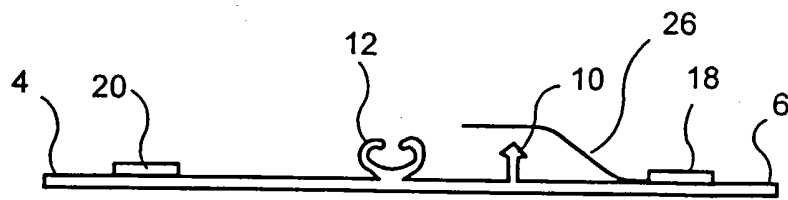


FIG. 13




FIG. 14




FIG. 15

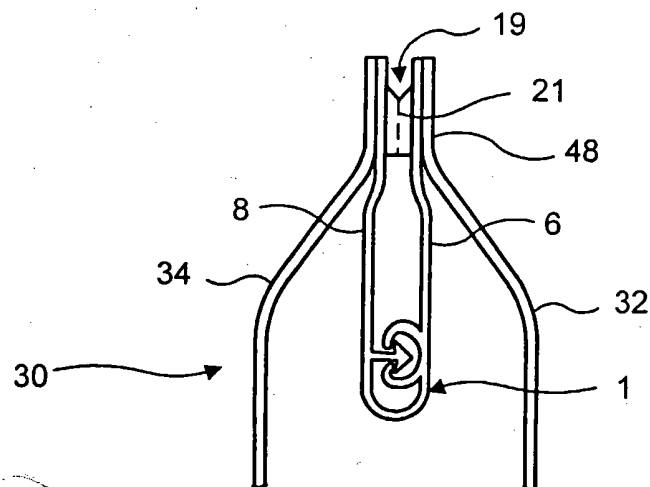
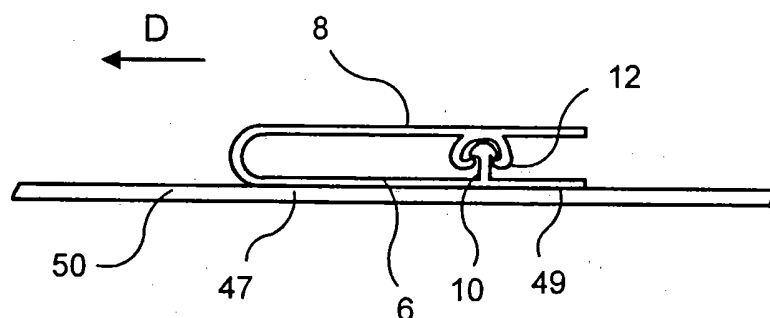
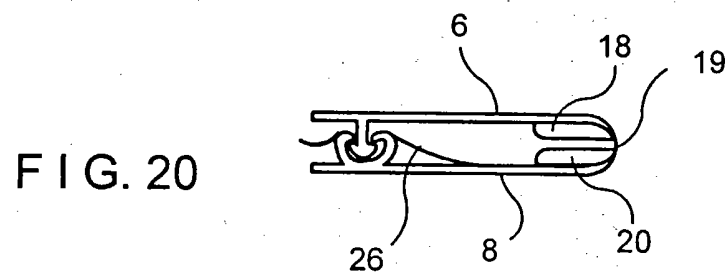
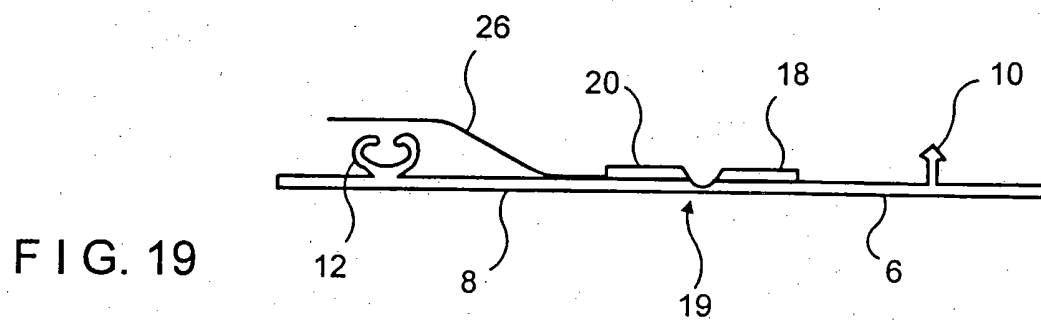
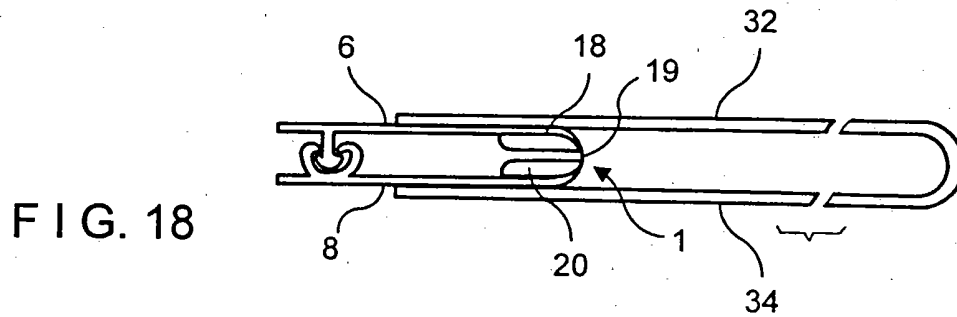
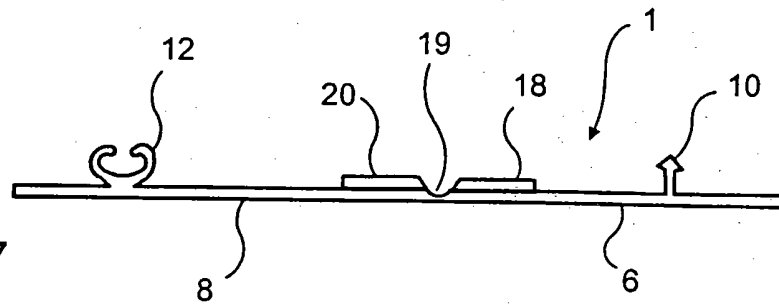


FIG. 16



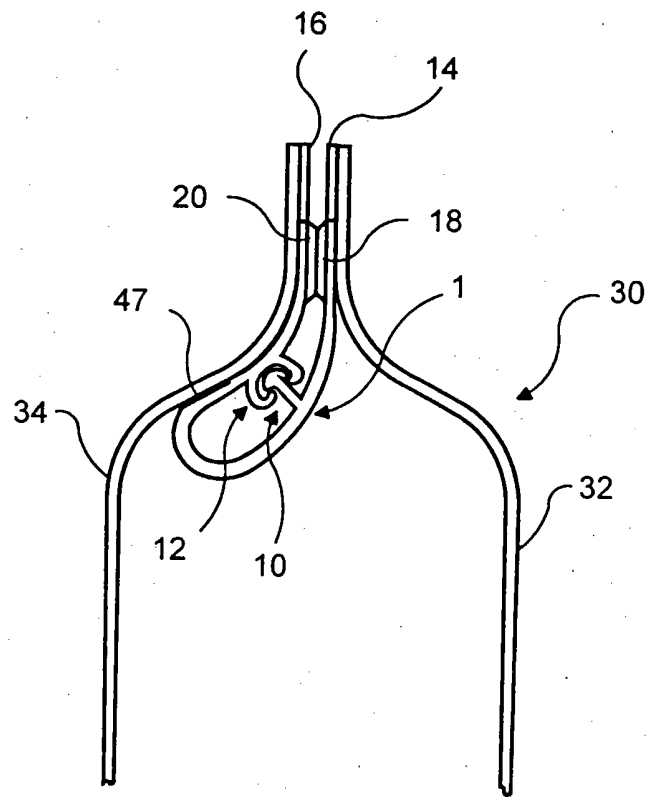


FIG. 22

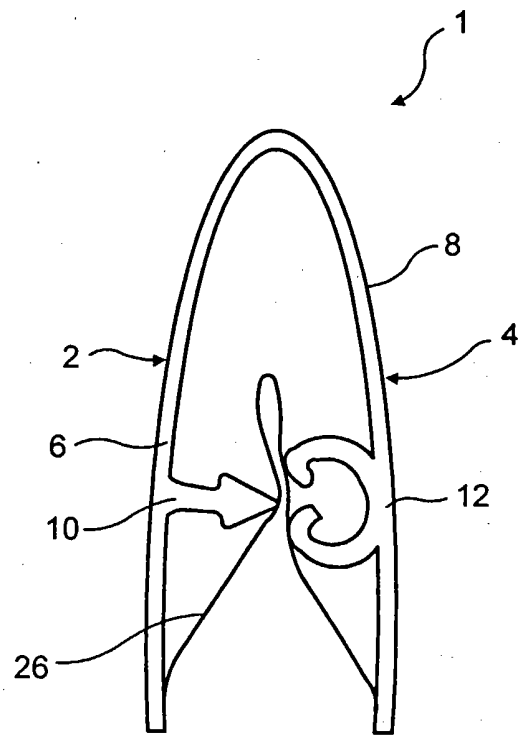


FIG. 23

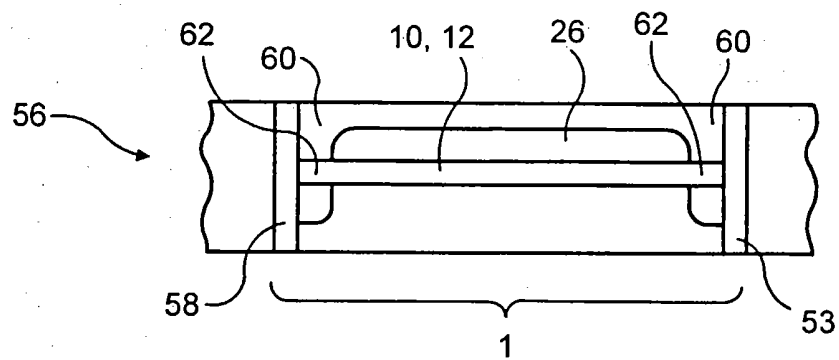


FIG. 24

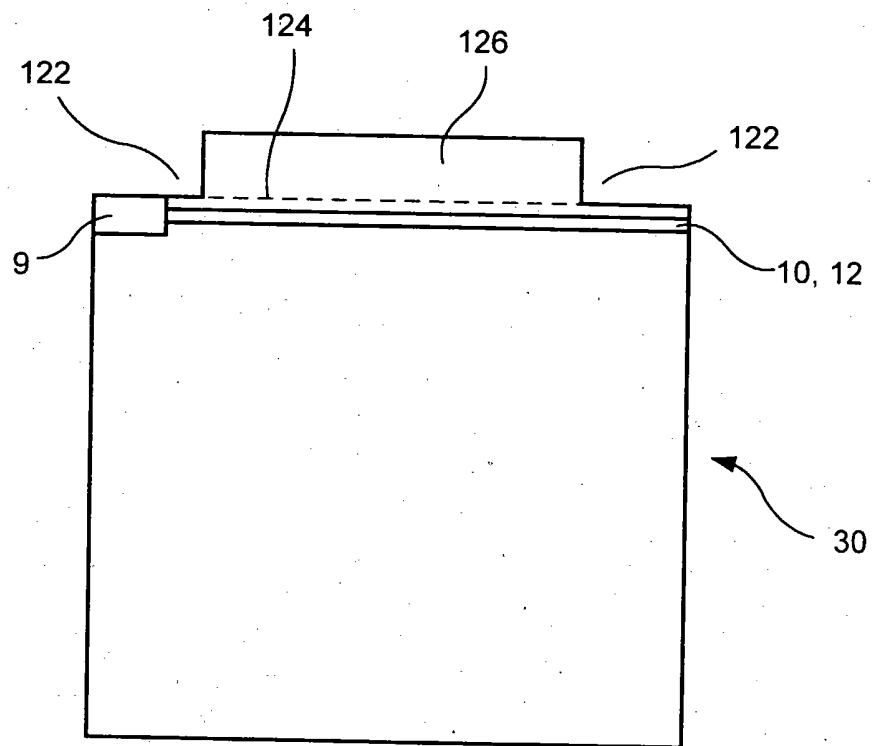


FIG. 25